



The future is now!



iDecking Revolution is brought to you by an Italian company established to innovate in the field of outdoor decking and wall claddings. Our team has carried out years of research and development with some of the world's most important architects, designers and qualified deck builders. This research has given us the opportunity to alleviate all the main issues and problems associated with traditional deck building techniques and materials, starting a true revolution in the decking field.



iDecking Revolution makes all this possible!



HARD ROCK HOTEL - IBIZA | EasyClick System + Duro Natural

Our patented systems **EasyClick** and **EasyChange** simplify and revolutionize all the traditions of installing systems used all over the world.

DURO is the name of the most innovative 100% recyclable material studied to reach the beauty of natural woods while limiting their most common issues tied to stability, resistance and longevity of traditional woods, which are now available via the **iDecking Revolution** offer.



Innovations@ DOMOTEX

THE WORLD OF FLOORING
HANNOVER - GERMANY

Winner of the
**International prize
for best innovations**



SELECTED INNOVATIONS
2015, 2016 & 2017



A jury of ten experts from the fields of design, architecture, interior design, the media and the property market assess the products in the respective categories according to specific criteria, including their relevance for the various target groups, technological innovation, design concept and quality.



**GERMAN
DESIGN
AWARD
2017**


German Design Award 2017



The German Design Award directly contributes to the overall commercial success. Prizes will only be awarded to projects that truly represent pioneering contributions to the German and international design landscape. The highly esteemed, international jury guarantees this. The German Design Award identifies and presents unique design trends: a competition that advances the design-oriented scene.



WOODLAND HILLS - LOS ANGELES - USA | EasyClick System + Duro Excellence



iDecking systems advantages:

NO SCREWS

iDecking does not require spacers, nails or screws, unlike traditional fastening systems and techniques, drastically reducing installation time and extending the product's lifespan.

Choosing **iDecking** allows you to enjoy walking on a totally clean, smooth deck surface.

AVOID WATER STAGNATION UNDER THE DECK

The unique design of the nylon clips of the **iDecking** systems avoid contact between the aluminium profile and the ground, allowing the substructure to be laid in any direction and letting the water flow away under the decking.

MORE DURABILITY

Our extremely durable and resilient aluminium rail system and nylon clips provides greater strength and durability unlike the traditional wood substructure which is prone to chipping and rotting.

Systems Warranty: 20 YEARS

FASTEST INSTALLATION

Save time! Save money !

iDecking systems are designed to speed up deck installation times - in most cases up to 5 times faster!

EasyChange system



EasyChange is a unique system that allows you to remove and replace any board individually in any part of the floor or wall using a special **iDecking Key**. No need to use any nails, screws, drills or spacers to fasten the boards on the understructures. Its design allows the self alignment of board joints. The **EasyChange** systems helps ensure a quick, simple and trouble-free installation.



1. TURN THE KEY

How does **EasyChange** system work?

EasyChange is comprised of an aluminium substructure which comes with prespaced special rotating nylon cams. Decking boards are then locked in place with a simple turn of the **EasyKey**.



**2. REMOVE AND
REPLACE THE DECKING**



SCAN THE CODE TO
WATCH THE VIDEO



What are the highlights of **EasyChange** system?

REMOVE AND REPLACE ANY DECKING BOARD FROM ANYWHERE IN THE FLOOR OR WALL

—

UP TO 50% FASTER INSTALLATION COMPARED TO TRADITIONAL DECK BUILDING

—

QUICK ACCESS FOR INSPECTION/CLEANING UNDER THE DECK

—

DOESN'T CAUSE WATER STAGNATION UNDER THE DECK

—

INCREASED STRUCTURAL INTEGRITY AND STRENGTH

—

CAN BE USED WITH ANY TYPE OF PAVEMENT

iFly hidden clip




iFly is the hidden clip that allows you to remove/replace decking boards from anywhere on your deck with the simple turn of a key. iFly can be installed on any kind of substructure like a traditional hidden fastener, but with all the benefits of the celebrated iDecking EasyChange system.



How does **iFly** clip work?

iFly is installed like any traditional decking clip. It is simply screwed onto the chosen rail (which can be wood, composite or metal). The upper part has a special rotating nylon head which allows the decking boards to be locked in place or removed with a simple turn of the **iFly Key**.

1. INSERT THE KEY

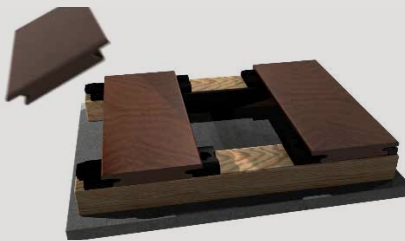

2. REMOVE AND REPLACE THE DECKING



SCAN THE CODE TO
WATCH THE VIDEO



What are the highlights of **iFly** clip?

REMOVE AND REPLACE ANY DECKING BOARD FROM ANYWHERE IN THE FLOOR OR WALL

-

QUICK ACCESS FOR INSPECTION/CLEANING UNDER THE DECK

-

CAN BE USED WITH ANY TYPE OF RAIL

-

DOESN'T RUST

EasyClick system



EasyClick is an innovative system which allows you to install **iDecking Revolution** boards simply using your feet. No need to use any nails, screws, drills, spacers or “obsolete” clips to install the boards on the understructures. The **EasyClick** system helps ensure a quick, simple and trouble free installation with the self alignment of board joints.




How does **EasyClick** system work?

EasyClick is an aluminium substructure rail which comes with pre-installed and pre-spaced patented **EasyClick** nylon clips. When pressing the deck boards against the nylon clip, the boards are fixed and self aligned.



SCAN THE CODE TO
WATCH THE VIDEO

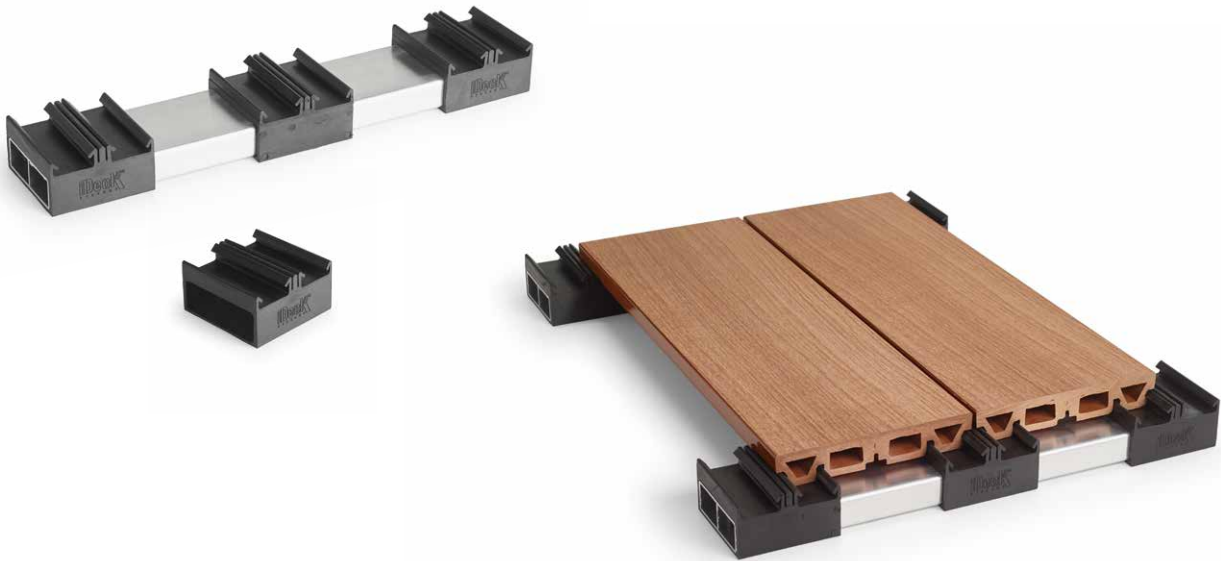


What are the highlights of **EasyClick** system?

- DECKING INSTALLATION UP TO 5 TIMES FASTER THAN TRADITIONAL DECK BUILDING
- DRASTIC REDUCTION OF INSTALLATION ERRORS
- “EFFORTLESS” INSTALLATION
- DOESN'T CAUSE WATER STAGNATION UNDER THE DECK
- INCREASED STRUCTURAL INTEGRITY AND STRENGTH
- SELF ALIGNING SYSTEM

Clips **EasyClick** system

CLIP A


Master Clip integrated in the standard understructure. This clip joints the profiles in order to create linear design decking or wall claddings.



EXAMPLE

CLIP B

This clip allows to install 2 vertical profiles and 1 horizontal profile, allowing to invert the design way.



EXAMPLE

B Clip modules **explanation** in 3 steps

B-Clip rails allow you to easily create modules. The modules can be pre-built and transported to site for an incredibly fast installation. Ideal for temporary/seasonal outdoor areas.



SCAN THE CODE TO
WATCH THE VIDEO

Fix expansion and contraction gaps with **iJack**

iJack was developed to overcome one of the common problems in composite decking - expansion & contraction.

The **iJack** is placed between the ends of the boards and locks them together.

AVAILABLE ON **EASYCHANGE**
AND **EASYCLICK DURO** BOARDS



SCAN THE CODE TO
WATCH THE VIDEO





Deckbuilder's zone

Professional Deckbuilders will be extremely happy to know that **iDecking EasyClick** system won't force them on their knees all day long and will also drastically reduce installation time!

Say good bye to wasting your time aligning each decking board since our **EasyClick** system automatically aligns it for you! **EasyClick** understructure "rails" are placed every 35 cm (1,14 ft), locking each decking board on four different points increasing the strength of the entire floor/wall structure.

Special **EasyClick** clips are also available to serve any decking design.





PRIVATE VILLA - UK | EasyClick System + Duro Excellence Denim



PRIV



DURO

One colour, Two finishings

DURO is a high quality material developed by **iDecking Revolution**. The main ingredient is rice husks combined with virgin polymers.

A secret formula and production process makes the material more versatile, resistant and durable.

DURO looks and feels extremely natural. It can be stained or treated for an extra level of protection, just like wood, by using any colour available from **iDecking Revolution**. **DURO** is 100% recyclable - the Eco-Friendly composite material Mother Nature herself would have created.

DURO decking can be installed both on the **EasyClick** and **EasyChange** systems. Boards are available in a choice of flat or anti-slip grooved surfaces.



**ECO FRIENDLY
MADE WITH
RICE HUSK**

FLAT

ANTISLIP



Which are the highlights of **DURO** material?

NATURAL LOOK AND FEELING CLOSE TO TROPICAL HARDWOODS

—

ECO-FRIENDLY - 100% RECYCLABLE

—

LOW MAINTENANCE

—

HIGH SLIP RESISTANCE

—

MORE STABLE AND DURABLE THAN TROPICAL HARDWOODS

—

CAN BE TREATED AND/OR STAINED AS YOU LIKE

—

NO SPLINTERS, BAREFOOT WALKING IS WELCOME!

—

WEATHERPROOF & WATERPROOF

—

INSECT AND TERMITE PROOF

—

B1 CLASS FIRE RESISTANT

DURO

for **EasyClick**
140x25mm (5,5 x 0,98 in)

FLAT SURFACE



ANTISLIP SURFACE



ALUMINUM UNDERSTRUCTURE
21x62 mm (0,82 x 2,44 in)


DURO


for **EasyChange**
140x24mm (5,5 x 0,94 in)


FLAT SURFACE



ALUMINUM UNDERSTRUCTURE
25x50 mm (0,98 x 1,96 in)

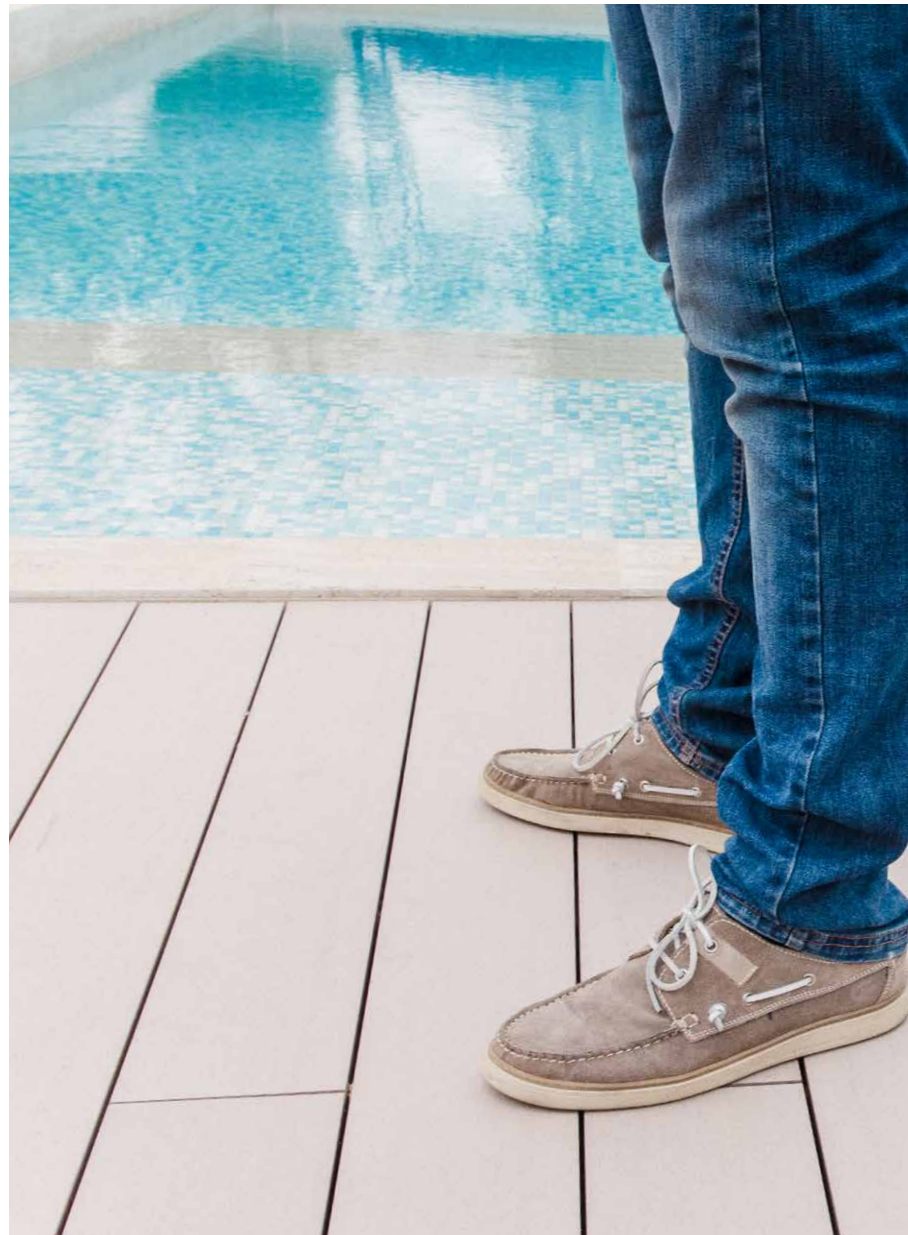

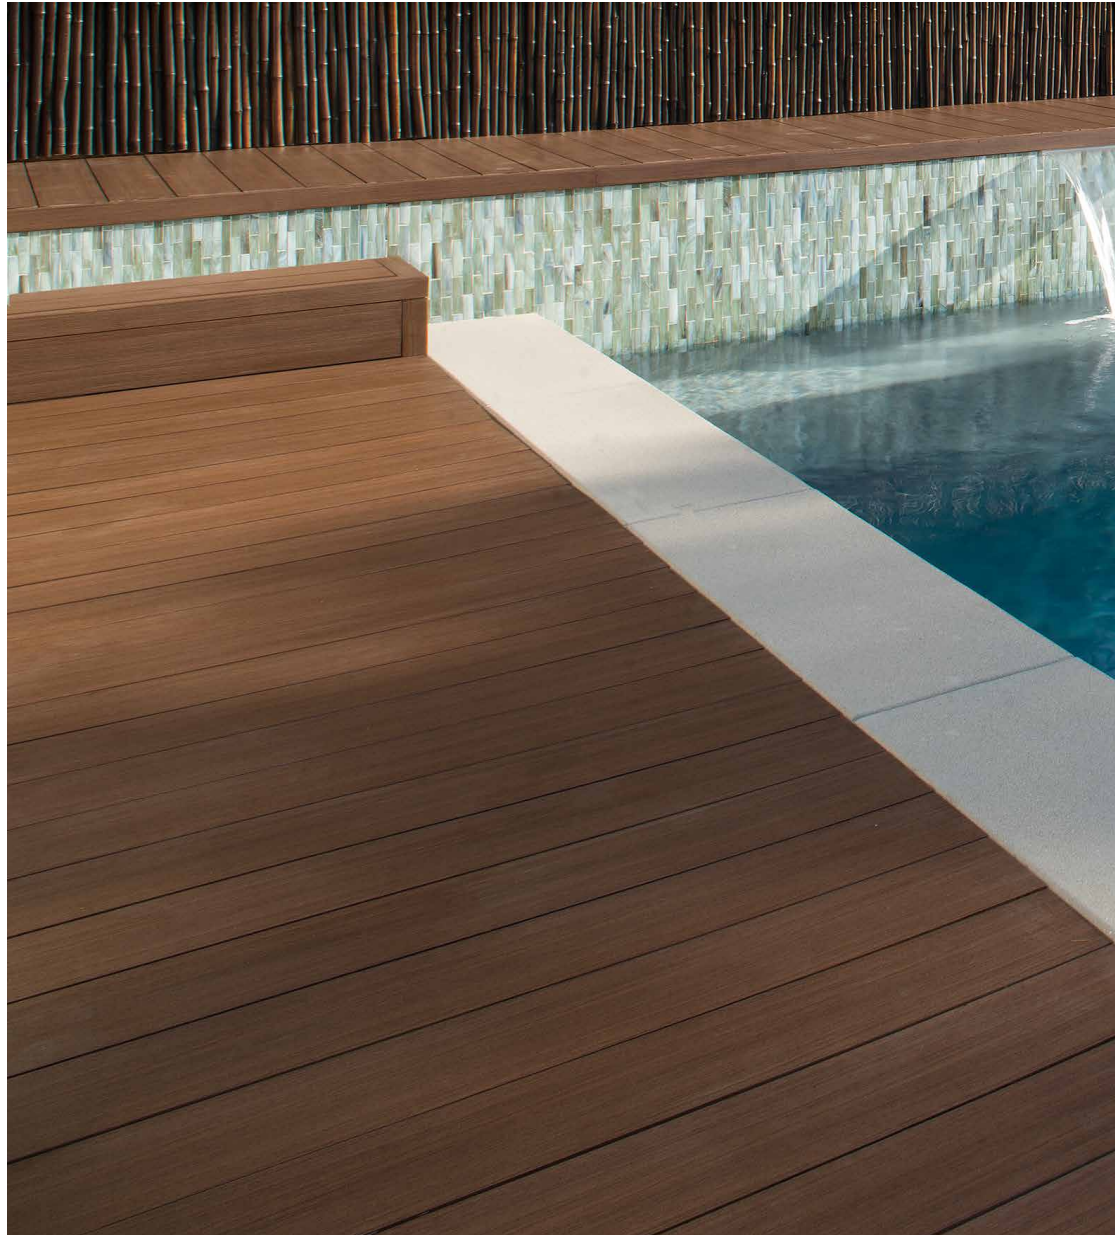

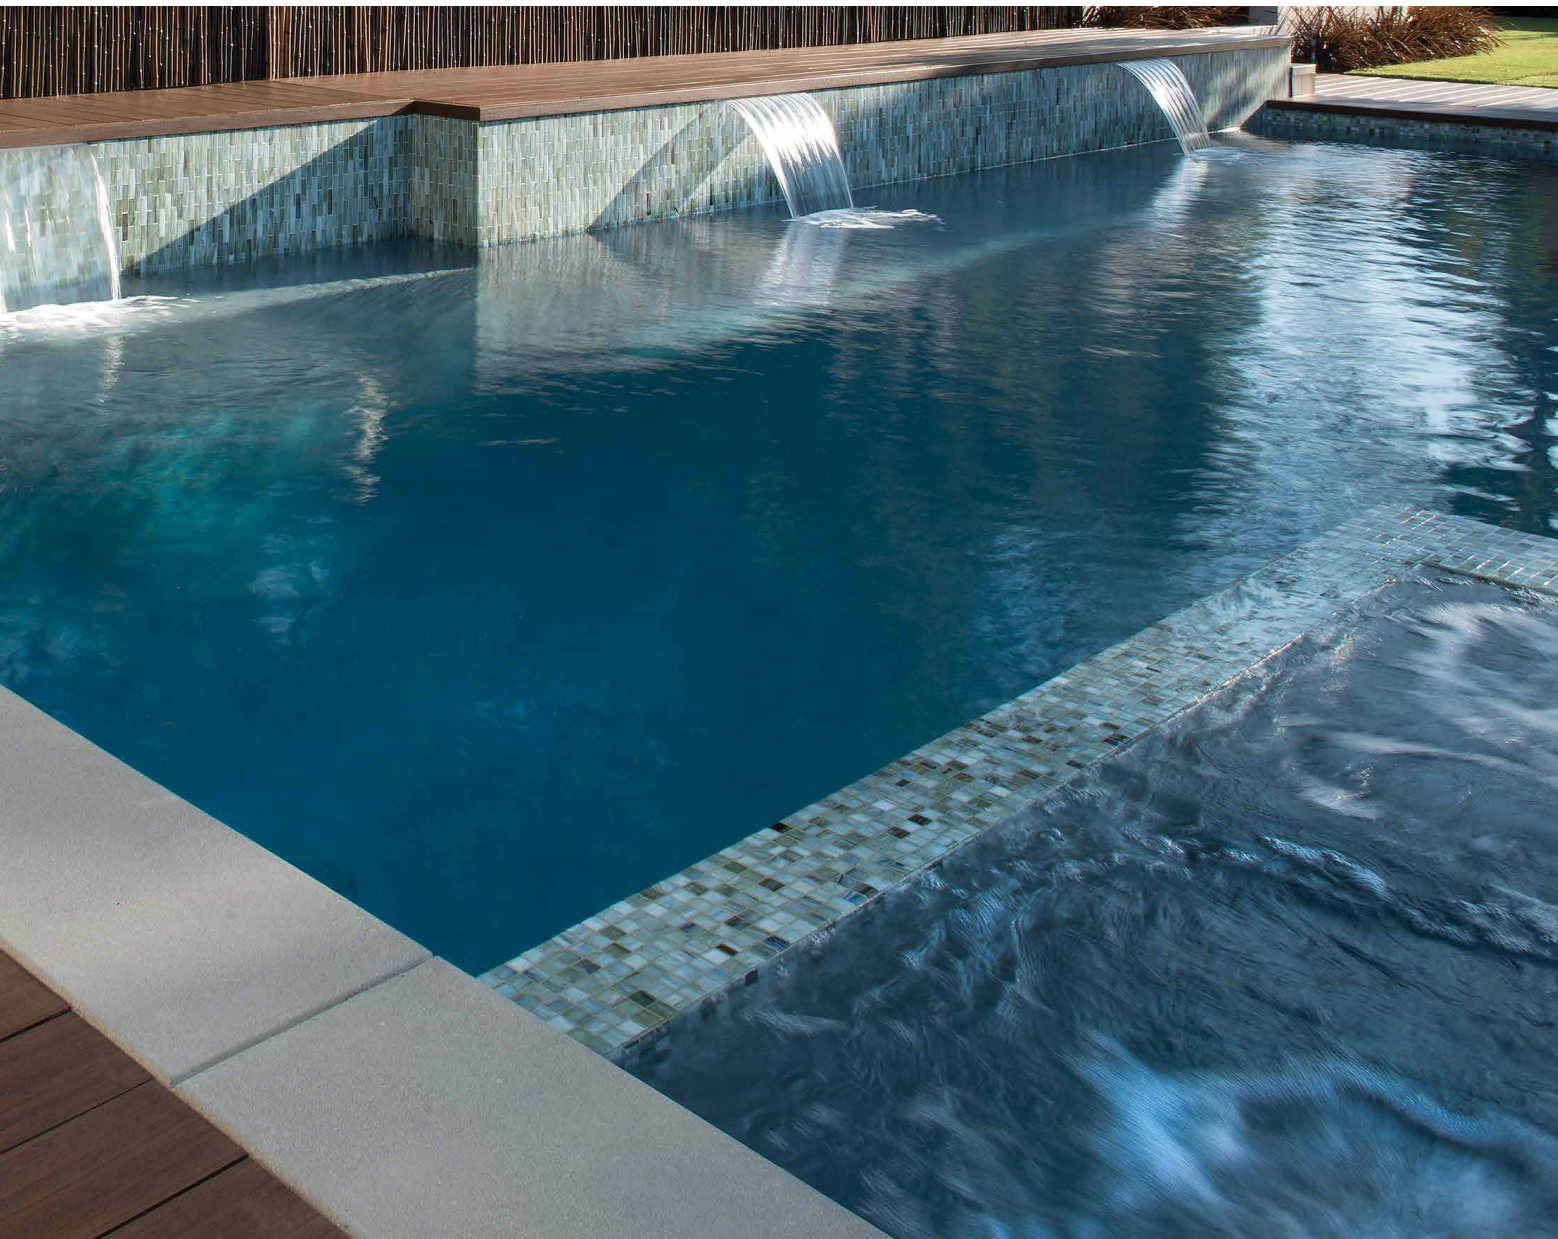

DURO *Excellence*

The **DURO Excellence** line brings our signature composite material to the next level. It provides the most natural looking decking boards available. The Virgin PVC and Rice Husk compound is coloured before extrusion, this helps to guarantee colour uniformity and grain consistency all the way through each board. **DURO Excellence** is available in seven colours. Six of them are finished with a wood grain effect making each board look unique!

DURO Excellence is available for both **EasyClick** and **EasyChange iDecking** installation systems.

Available colours

WOOD GRAIN EFFECT



MOOR OAK



DARK CHOCO
LONGER LEAD TIME



DENIM



TERRA



SADDLE
LONGER LEAD TIME



TEAK



IVORY WHITE



IVORY WHITE

DENIM

TEAK

TERRA

MOOR OAK

DARK CHOCO

SADDLE

Which are the highlights of **DURO** *Excellence* material?

NATURAL LOOK AND FEELING CLOSE TO TROPICAL HARDWOODS

- COLOURED BEFORE EXTRUSION
- WOOD GRAIN EFFECT ON SIX COLOURS
- ECO-FRIENDLY - 100% RECYCLABLE
- HIGH SLIP RESISTANCE
- LOW MAINTENANCE
- MORE STABLE AND DURABLE THAN TROPICAL HARDWOODS
- NO SPLINTERS, BAREFOOT WALKING IS WELCOME!
- WEATHERPROOF & WATERPROOF
- INSECT AND TERMITE PROOF
- B1 CLASS FIRE RESISTANT

DURO Tech details

MATERIAL CHARACTERISTICS

Tensile strenght at break	35.1 N/mm ²	
Elongation at break	3%	
Thermal conductivity	015 W / (mk)	
Density	ca 1280Kg/mt	
Nail withdrawal test	ASTMD 6117	105 N
Screw withdrawal test	ASTMD 6117	312 N
Humidity behaviour	very low humidity absorption no dimensional change	
Water absorption	very low humidity absorption no dimensional change	0,26% ASTM D570
Linear expansion at 40°C Temperature		0,13%

EMISSION TEST

(TUV SINGAPORE, SEPTEMBER 2010)

Formaldehyde emission	<0,01mg per m ³ per hour	
PHTALATE EMISSION		
DEHP (Di-ethylhexylphtalate)	<0,003mg per m ³ per hour	
DBP (di-n-butylphtalate)	<0,003mg per m ³ per hour	
BBP (Benzybutylphtalate)	<0,003mg per m ³ per hour	
Fire Behaviour	B1	

RAW MATERIAL

rice husks, virgin pvc

HAMBURG UNIVERSITY TESTS

Slipperiness	CEN/TS 15676	pass
Falling mass impact resistance	EN 477	pass
Flexural properties	EN 310	pass
Creep behaviour	EN 15534	pass
Moisture resistance under cyclic test conditions	EN 321	pass
Swelling and water absorption	EN 317	pass
Linear thermal expansion	ISO 11359-2	pass

iDecking Revolution



HARD ROCK HOTEL - TENERIFE | EasyClick System + Duro Excellence

ETHERNO

X-Treme Bamboo + iDecking systems

As a leading company in the innovation of decking systems and materials, **iDecking Revolution** is caring deeply about developing quality and strong relationships with companies whose mission is inventing Green and Eco-Friendly solutions. The proud partnership with MOSO has led to the production of **ETHERNO**: the new decking solution made of MOSO's proven Bamboo X-Treme boards (100% bamboo) combined with iDecking Revolution EasyClick and EasyChange systems. Bamboo grows much faster than any tree and is among the most prolific resources on earth. Through a specialized process of compression and thermo treatment, **ETHERNO** provides strength, stability and durability.



Which are the highlights of
ETHERNO product?

ECO-FRIENDLY BOARDS MADE OF
THERMO DENSITY BAMBOO

–

INNOVATIVE INSTALLATION

–

EXTREMELY STABLE AND DURABLE

–

FSC CERTIFICATION ON REQUEST

–

WEATHERPROOF & WATERPROOF

–

NATURAL AGING WITH PATINA

–

INSECT AND TERMITE PROOF

–

FIRE RESISTANT: BFL-S1

32

33

PARCO DEI CIMINI | Easychange + Ethern Bamboo Flat

ETHERNO

155x20x1850 mm (6,10 x 0,78 in - length: 6,06 ft)


FLAT OR ANTISLIP
SURFACE



FLAT OR ANTISLIP
SURFACE



EasyClick

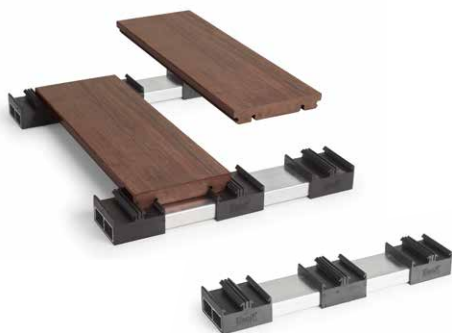

ALUMINUM UNDERSTRUCTURE
21x62 mm (0,82 x 2,44 in)

EasyChange



ALUMINUM UNDERSTRUCTURE
25x50 mm (0,98 x 1,96 in)





iDecking blades

Working with some of the best architects in the world has led us to develop a unique product in our composite range.

iDecking Revolution Blades have been developed to satisfy requests for pergolas, fences, gates, blades, fins etc. The **Blades** measures 41x200 mm (1,61 x 7,87 in) and available in the same finishes as our unique **DURO** and **DURO Excellence** Composite Material.

YOU DREAM WE BUILD IT!




WOODLAND HILLS - LOS ANGELES - USA | EasyClick System + Duro Excellence








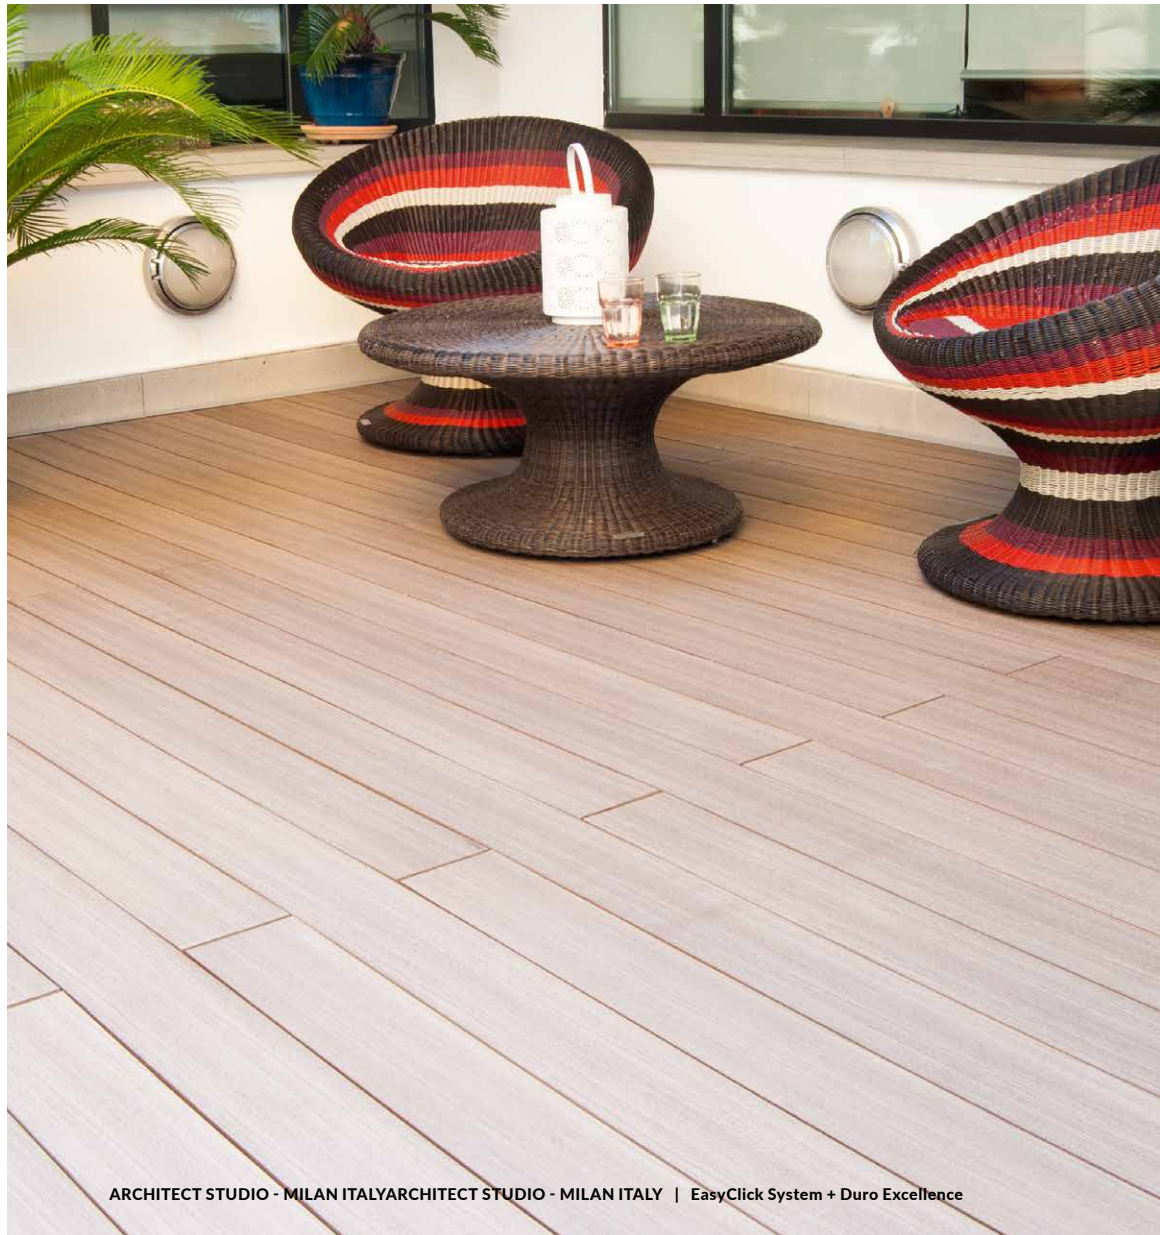




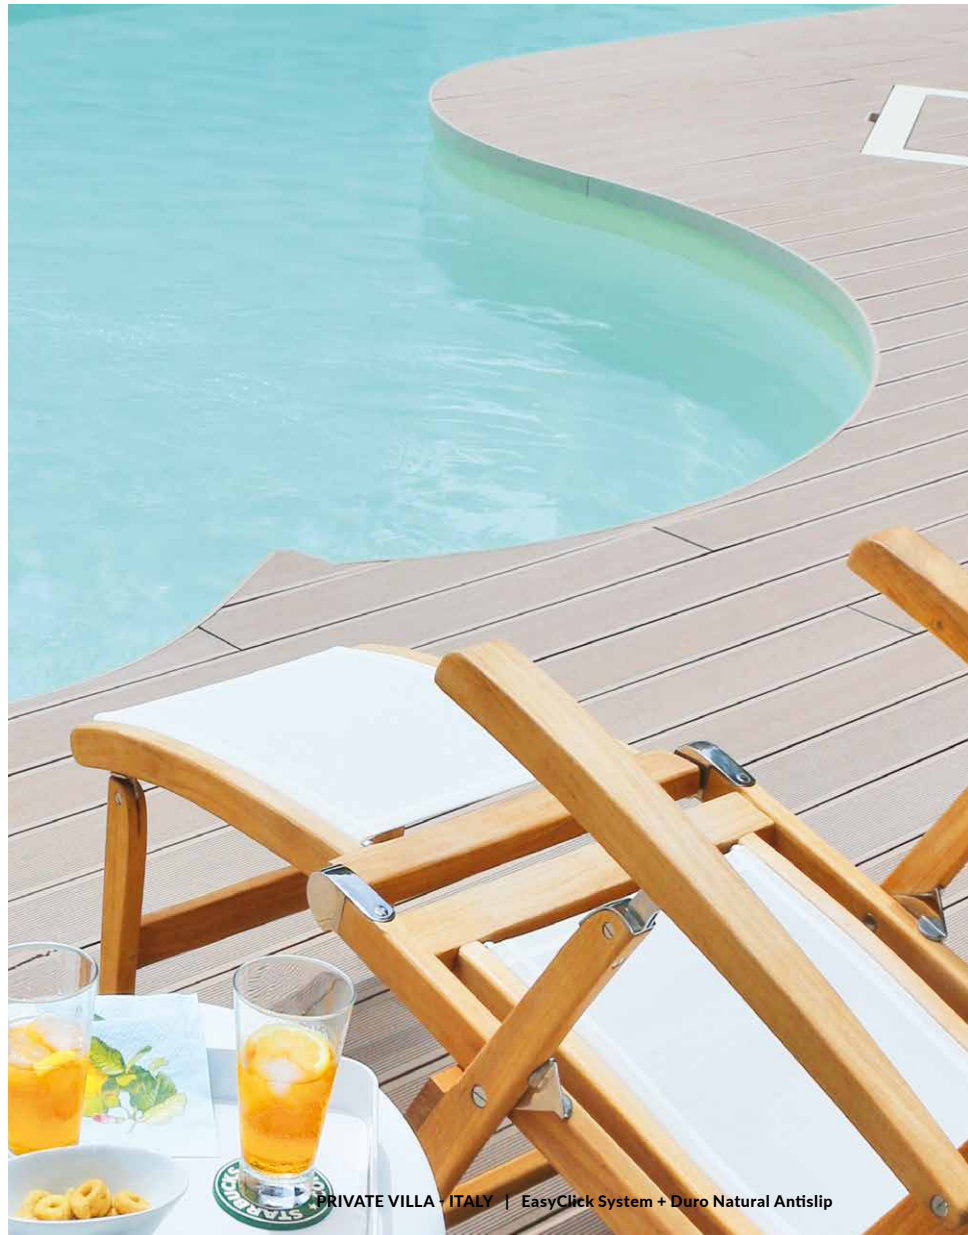

Systems Technical Datas

EASYCLICK SYSTEM RAILS - CLIP A

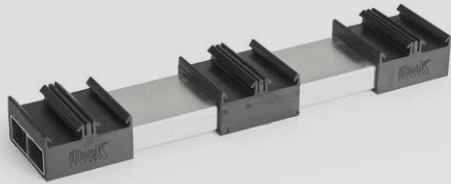


Rail for standard 140 mm wide board	Code CLSOT140AL
Size (1 piece)	62 x 21 x 2070 mm (2,44 x 0,82 in - 6,79 ft)
Weight	2,3 kg
Pallet	448 pcs
Pallet size	220 x 115 x 124 cm (7,21x3,77x4,06 ft)
Pallet weight	1.050 kg

AVAILABLE ALSO FOR

Decking board width range 87-90 mm (3,4-3,54 in)	length 2040 mm (6,69 ft) +/- Code CLSOT90AL
Decking board width range 93-95 mm (3,6x3,74 in)	length 2030 mm (6,66 ft) +/- Code CLSOT95AL
Decking board width range 108-110 mm (4,25x4,33 in)	length 2000 mm (6,56 ft) +/- Code CLSOT110AL
Decking board width range 118-120 mm (4,64x4,72 in)	length 2070 mm (6,79 ft) +/- Code CLSOT120AL
Decking board width range 155 mm (6,1 in)	length 1980 mm (6,49 ft) +/- Code CLSOT155AL

EASYCLICK SYSTEM RAILS - CLIP B

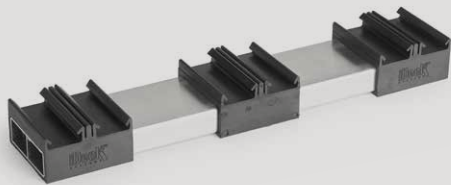

Rail for standard 140 mm wide board	Code CLSOT140ALB
Size (1 piece)	62 x 21 x 2070 mm (2,44 x 0,82 in - 6,79 ft)
Weight	2,3 kg
Pallet	448 pcs
Pallet size	220 x 115 x 124 cm (7,21x3,77x4,06 ft)
Pallet weight	1.050 kg

AVAILABLE ALSO FOR

Decking board width range 87-90 mm (3,4-3,54 in)	length 2040 mm (6,69 ft) +/- Code CLSOT90ALB
Decking board width range 93-95 mm (3,6x3,74 in)	length 2030 mm (6,66 ft) +/- Code CLSOT95ALB
Decking board width range 108-110 mm (4,25x4,33 in)	length 2000 mm (6,56 ft) +/- Code CLSOT110ALB
Decking board width range 118-120 mm (4,64x4,72 in)	length 2070 mm (6,79 ft) +/- Code CLSOT120ALB
Decking board width range 155 mm (6,1 in)	length 1980 mm (6,49 ft) +/- Code CLSOT155ALB

EASYCHANGE SYSTEM RAILS



Rail for standard 140 mm wide board	Code CHSOT140AL
Size (1 piece)	50 x 25 x 2120 mm (1,96x0,98 - 6,95 ft)
Weight	2,2 kg
Pallet	512 pcs
Pallet size	220 x 115 x 124 cm (7,21x3,77x4,06 ft)
Pallet weight	1.140 kg

AVAILABLE ALSO FOR

Decking board width range 90-95 mm (3,54x3,74 in)	length 2050 mm (6,72 ft) +/- Code CHSOT95AL
Decking board width range 108-110 mm (4,25x4,33 in)	length 2100 mm (6,88 ft) +/- Code CHSOT110AL
Decking board width range 118-120 mm (4,64x4,72 in)	length 2040 mm (6,69 ft) +/- Code CHSOT120AL
Decking board width range 155 mm (6,1 in)	length 2030 mm (6,66 ft) +/- Code CHSOT155AL

OPTIONAL FULL BLACK


Available as optional even in Black Colour	Minimum order 1 Pallet
--	------------------------

EASYCHANGE KEY




Code	CHKEY
Size (1 piece)	85 x 10 x 80 mm (3,34x0,39x3,1 in)
Package	box
Pieces in a box	10
Box size	12 x 9 x 9 mm (4,72,x3,54x3,54 in)

Clips & Accessories Technical Datas



EASYCHANGE START/END CLIP

Code	CHCLIPPFAL
Look	Each clip is 2 pieces
Package	Plastic bag
Pieces per bag	50



IJACK

Code	CHCLIPPFAL
Package	Plastic bag
Pieces per bag	50



PRIMARY UNDERCONSTRUCTION RAILS

To be used for floating decks	Code PRSOT1200
Size (1 piece)	50 x 30 x 3000 mm (1,96x1,18 in - 9,84 ft)
Aluminum thickness	3 mm (0,11 in)
Weight (1 piece)	3.6 kg
Packaging	Bulk profiles
Pedestal span	700 mm MAX (2,29 ft)
Recommended interval	700 mm MAX (2,29 ft)
Decking board width range 118-120 mm (4,64x4,72 in) length 2070 mm (6,79 ft) +/-	Code CLSOT120AL




IFLY DECKING CLIP

Traditional decking clip with EasyChange function	Code IFLY
Material	Fiberglass reinforced technopolymer
Package	bag
Pieces per bag	50
Bags per box	18
Box size and weight	30 x 40 x 20 cm - 11.7 Kg (11,8x15,74x7,87 in)
Boxes per pallet	80
Pallet size and weight	120 x 80 x 220 h. - 936 Kg (3,93x2,62x7,21 ft)
Complimentary tools	EasyChange Key (CHKEY) - Start/End Clip



IFLY KEY

Code	IFKEY
Size (1 piece)	85 x 10 x 80 mm (3,34x0,39x3,1 in)
Package	box
Pieces in a box	10
Box size	12 x 9 x 9 mm (4,72,x3,54x3,54 in)



IFLY START/END CLIP

Code	IFCLIPPF
Look	Nylon Clip
Package	Plastic bag
Pieces per bag	50

Boards Technical Datas



DURO NATURAL

Decking board composition	Rice Husks + PVC
Systems	EasyClick / EasyChange
Surface	Flat / Antislip
Colours	Aged
Size (1 piece)	140 x 25 x 2800 mm (5,5x0,98 in - 9,18 ft)
Weight (1 piece)	9.2 kg
Pallet	161 pcs (62 sqm / 667 ft2 +/-)
Pallet size	100 x 280 x 70h cm (3,2x9,1x2,29 ft)
Pallet weight	1.500 kg +/-

QUICK FACTS

Duro pieces needed for 1 squared meter	2.5
Duro linear meters for 1 squared meter	6.93 meters
iJack hole	optional



DURO EXCELLENCE

Decking board composition	Rice Husks + PVC
Systems	EasyClick / EasyChange
Surface	Flat / Antislip with wood grain effect
Colours	Teak - Terra - Moor Oak - Denim - Ivory White (no wood grain effect) - Dark Choco (longer lead time) - Saddle (longer lead time)
Size (1 piece)	140 x 25 x 2800 mm (5,5x0,98 in - 9,18 ft)
Weight (1 piece)	9.2 kg
Pallet	161 pcs (62 sqm / 667 ft2 +/-)
Pallet size	100 x 280 x 70h cm (3,2x9,1x2,29 ft)
Pallet weight	1.500 kg +/-

QUICK FACTS

Duro pieces needed for 1 squared meter	2.5
Duro linear meters for 1 squared meter	6.93 meters
iJack hole	Yes



ETHERNO (X-TREME BAMBOO + IDECKING SYSTEMS)

Decking board composition	100% Bamboo - Code: BO-DTHT191G
Systems	EasyClick / EasyChange
Surface	Flat
Colours	Chocolate
Size (1 piece)	155 x 20 x 1850 mm (6,1x0,78 in - 6 ft)
Weight (1 piece)	6.3 kg
Pallet	168 pcs
Pallet size	185.5 x 115 x 65 cm (6,08x3,77x2,13 ft)
Pallet weight	1200 kg +/-

QUICK FACTS

Etherno pieces needed for 1 squared meter	3.5
Etherno linear meters for 1 squared meter	6.40 meters



IDECKING BLADES

Decking board composition	Rice Husks + PVC
Systems	bulk profile
Surface	Flat sanded on 4 sides
Colours	Available in all Duro/Duro Excellence Colours
Size (1 piece)	200 x 41 x 2800 mm (7,87x1,61 - 9,18 ft)
Weight (1 piece)	11.2 Kg
Pallet	65 pcs
Pallet size	100 x 280 x 70h cm (3,2 x 9,18 x 2,29 ft)
Pallet weight	750 kg

Framing Profiles Technical Datas



DURO 25 X 70 MM PROFILE

Profile composition	Rice Husks + PVC
Systems	Universal
Surface	Flat sanded on 4 sides
Colours & Finishings	Duro Natural (Aged) / Duro Excellence: Teak - Terra - Moor Oak - Denim - Ivory White (no wood grain effect) - Dark Choco (longer lead time) - Saddle (longer lead time)
Size (1 piece)	70 x 25 x 2200 mm (2,7x0,98 in - 7,21 ft)
Weight (1 piece)	6 kg
Package	Carton
Pieces per carton	5
Carton size	8 x 8 x 220 cm (3,14 x 3,14 in - 7,21 ft)
Carton weight	30kg



DURO 19 X 95 MM PROFILE

Profile composition	Rice Husks + PVC
Systems	Universal
Surface	Flat sanded on 4 sides
Colours & Finishings	Duro Natural (Aged) / Duro Excellence: Teak - Terra - Moor Oak - Denim - Ivory White (no wood grain effect) - Dark Choco (longer lead time) - Saddle (longer lead time)
Size (1 piece)	95 x 10 x 2200 mm (3,74 x 0,39 in - 7,21 ft)
Weight (1 piece)	2.8 kg
Package	Carton
Pieces per carton	5
Carton size	10 x 5.5 x 220 cm (0,39 x 2,16 in - 7,21 ft)
Carton weight	14kg



DURO STEP PROFILE 59X52 MM

Profile composition	Rice Husks + PVC
Systems	EasyClick
Surface	Flat sanded on 2 sides
Colours & Finishings	Duro Natural (Aged) / Duro Excellence: Teak - Terra - Moor Oak - Denim - Ivory White (no wood grain effect) - Dark Choco (longer lead time) - Saddle (longer lead time)
Size (1 piece)	59 x 52 x 2800 mm (2,32 x 2,04 in - 9,18 ft)
Weight (1 piece)	8 kg
Package	Carton
Pieces per carton	4
Carton size	10 x 5.5 x 280 cm (0,39 x 0,18 in - 9,18 ft)
Carton weight	32kg



X-TREME BAMBOO 137 X 20 X 1850 MM

Profile composition	100% Bamboo - Code: BO-DTHT162
Systems	Universal
Surface	Flat
Colours	Chocolate
Size (1 piece)	137 x 20 x 1850 mm (5,39x0,78 in - 6,06 ft)
Package	1 unit bulk - to be added on decking pallet
Weight	5.5 Kg

Maintenance products for iDecking



DURO SHIELD

Code	IMPTRA05
Content	5 litres
sqm/litre	15 squared meters - 1 coat
Sale unit	1 can



DURO DROP

Code	DROP05
Content	5 litres
sqm/litre	40-50 squared meters - 1 coat
Sale unit	1 can



DURO CLEANER

Code	CLEAN02
Content	2 litres
sqm/litre	-
Sale unit	1 can



DURO INTENSIVE CLEANER SPRAY

Code	SPRAY20
Content	0,2 litres
sqm/litre	-
Sale unit	1 bottle



OIL FINISHING FOR WOODEN AND BAMBOO DECKS

Code	IMPOIL05
Content	5 litres
sqm/litre	7-10 squared meters - 1 coat
Sale unit	1 can

Maintenance requirements for iDecking

Before, **use**

Apply 1 coat of DURO SHIELD preferably before or during installation.

If done after the installation, make sure to deep clean it with DURO CLEANER and then apply the coats of DURO SHIELD.

Once the deck is clean and treated with DURO SHIELD, use DURO DROP applying it with a rag or sponge and allow to dry.

This treatment makes the deck easier to clean and slows down the rate of fade.

Regular, **maintenance**

CLEAN THE DECK:

Use DURO CLEANER to wash the dirt from the deck. The deck can also be cleaned with a high pressure hose. Dilute DURO Cleaner in water (3 capfuls in 1 litre of water). Wash the floor with a well wrung out cloth. Rinse free. Recommended frequency: 15 days.

PROTECTOR:

Once the deck is clean, use DURO DROP applying it with a rag or sponge and allow to dry. Using DURO DROP protects the deck from stains and everyday grime. This can be re-applied regularly. As it is a more fluid material than DURO SHIELD, it is applied much easier and delivers a higher yield. For DURO DROP to work correctly, the boards have to have been protected with DURO SHIELD.


OIL/FAT SPOTS:

For persistent fat/oil spots apply the DURO INTENSIVE CLEANER SPRAY. Shake well DURO Intensive Cleaner before the use. Spray it directly on the spots that have to be removed, keeping a 25 cm distance. Let the product act for at least 2-3 minutes than brush and rinse with water. In case of tough dirt, re-apply DURO INTENSIVE CLEANER following the same procedure. The subsequent protective treatment can be performed with DURO DROP

iDecking

REVOLUTION

SCAN THE CODE TO DOWNLOAD THIS CATALOGUE IN YOUR LANGUAGE

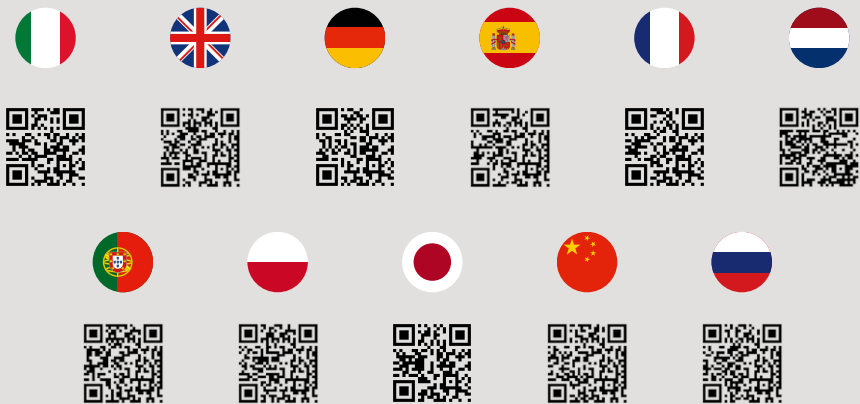

OR GO TO WWW.IDECKSYSTEMS.COM/DOWNLOADS

www.idecksystems.com



IDECK SRL
S.S. CASSIA KM. 62,200 - 01019 - VETRALLA (VT) - ITALY
INFO@IDECKSYSTEMS.COM - WWW.IDECKSYSTEMS.COM